

## CE DECLARATION OF CONFORMITY

LK Armatur AB, Garnisonsgatan 49, SE – 254 66 Helsingborg – Sweden

[www.lkarmatur.se](http://www.lkarmatur.se) info@lkarmatur.se

### DECLARES

Smart Comfort series LK 100CT, LK110-RT, LK120-RT, LK130-RT

### COMPLY

with the following directives

2006/95/EC (LVD), 2004/108/EC (EMC)

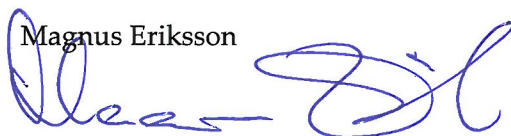
### CONFIRMS ALSO THAT

the products are classified as Class II

The conformity was assessed in accordance with the following EN standards:

EN 60730-1:2011 + amendments	Automatic electrical controls for household and similar use. General requirements
EN 60730-2-9:2008 + amendments	Automatic electrical controls for household and similar use. Particular requirements for temperature sensing controls
EN 61000-6-2:2005	EMC. Immunity for industrial environments
EN 61000-6-3:2007	EMC Emission for residential, commercial and light industrial environments

Helsingborg, 19 August 2014

Magnus Eriksson  


Managing Director

## CE DECLARATION OF CONFORMITY

LK Armatur AB, Garnisonsgatan 49, SE – 254 66 Helsingborg – Sweden

[www.lkarmatur.se](http://www.lkarmatur.se) info@lkarmatur.se

### DECLARES

Smart Comfort wireless series LK120 RTW, LK130 RTW

### COMPLY

with the following directives

2006/95/EC (LVD), 1999/5/EC (R&TTE), 1999/519/EC (EMC)


### CONFIRMS ALSO THAT

the products are classified as Class II

The conformity was assessed in accordance with the following EN standards:

EN 60730-1:2011 + amendments	Automatic electrical controls for household and similar use. General requirements
EN 60730-2-9:2008 + amendments	Automatic electrical controls for household and similar use. Particular requirements for temperature sensing controls
EN 55024:2010 + amendments	Information technology equipment - Immunity characteristics - Limits and methods of measurement
EN 301489-3:2003	EMC and Radio spectrum Matters (ERM) [...] - Part 3: Specific conditions for Short-Range Devices (SRD) operating on frequencies between 9 kHz and 246 GHz
EN 300220-2:2012	EMC and Radio spectrum Matters (ERM) - Short Range Devices [...] to be used in the 25 MHz to 1000 MHz frequency range with power levels ranging up to 500 mW.

Helsingborg, 19 August 2014

Magnus Eriksson  
  
Managing Director

14 DoC SmartComfort.docx Rel. 1